

DESCRIPTIONS

This strip light is mainly for commercial use. It can be used in warehouse, office, garage, display shops and other commercial applications.

SPECIFICATIONS

- Lumen output is more than 132-135 lumens per watt
- CRI more than 80
- Input voltage can be AC100-277V
- Reduces energy consumption up to 60%
- 5 year lifespan
- Surface/pendant mounting installation
- Suitable for damp location
- Glass free
- DLC Listed


DIMENSIONS

4 ft. - 48"L x 3.56"H x 3.35"W
8 ft. - 95.9"L x 3.56"H x 3.35"W





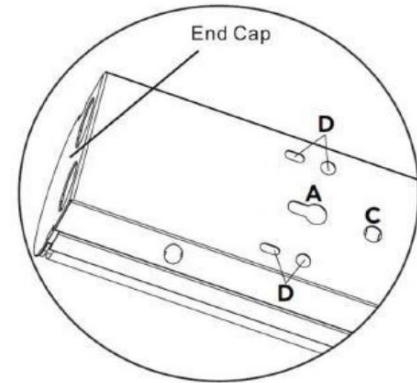

MOUNTING OPTION

- A - KEYHOLE SLOTS FOR SURFACE MOUNTING/
- B - WIRING KNOCKOUTS
- C - T-BAR CLIP MOUNTING HOLE
- D - V-HOOK OPENINGS FOR CHAIN MOUNTING



ORDERING INFORMATION

EXAMPLE: JSR48L40W5400LDMV40K

JSR	48L	40W5400L	DMV	40K
Series	Width	Wattage and Lumen	Driver	Kelvin Temperature
JSR LED Strip	48L 48"	 24W3200L 24 System Watts 3200 Delivered Lumens	DMV 0-10V Dimming	35K 3500L
	48L 48"	 40W5400L 40 System Watts 5400 Delivered Lumens		40K 4000L 50K 5000L
	96L 96"	 60W8400L 60 System Watts 8400 Delivered Lumens		
	96L 96"	 68W9400L 68 System Watts 9400 Delivered Lumens		


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

Texas Fluorescents
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:


Mounting options:

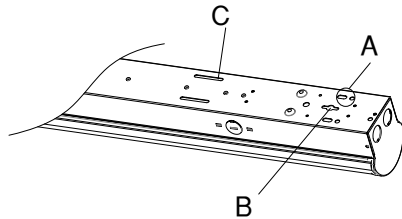


- A. Chain and V hook mounting
- B. Surface mounting
- C. Mounting plate installation




Installation Steps:

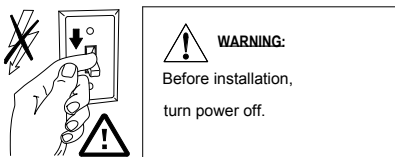


A. Chain and V hook mounting




1. Tie hook with chain (or wirerope) and then insert it into installation hole.



2. Fix chain to installation location, adjust the height of chain until fixture is balanced.




3. Connect AC wire and dimming wire.




4. Wrap wires with metal material.

B. Surface mounting




1. Lock the wire box cover.




2. Connect AC wire and dimming wire.

Notice:
If there is no wire box in the ceiling, you can not use the wire box cover.




3. Lift up the fixture and put wires into box.




4. Lock the fixture by nail.

Notice:
If you don't use dimming wire, please insulate both ends of dimming wire.

C. Mounting plate installation




1. Lateral movement and remove the diffuser.




2. Bend mounting plate, fixed to bottom of the fixture by screws, and then fix it to the installation position.

WARNING:
If connect wire at side, please insulate both ends of AC wire at the bottom.



3. Connect wire. If connect wire at side, please insulate both ends of AC wire at the bottom.



4. Put the wire back in the box. Multiple fixtures can be installed on a line. But can not be connected to more than 10 fixtures because of limited wire load.

WARNING:
Multiple fixtures can be installed on a line. But can't be connected to more than 10 fixtures because of limited wire load.