

# 202 Series 4ft

Premium 90 Degree Wraparound

**INTENDED USE:**

Premium grade surface mounted wraparound luminaire with low brightness linear sides. For use in indoor applications where high efficiency, high performance and ease of installation is required. Ideal for retail stores, stairwells, utility areas, schools, offices and public buildings

**FEATURES & BENEFITS**

- P3 technology - Post Powder Paint
- > 90% reflectivity
- Corrosion and scratch resistant
- Smooth edges for easy handling
- 90 degree sides for easy side wiring
- Nominal 7 3/4" wraps
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in lengths of 48 and 96 inches - (4' and 8' lengths)
- Surface or chain mounted
- Single or continuous row mounting capability
- Every fixture individually tested

**MATERIAL**

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance P3 - Post Powder Paint. Diffuser hinges from either side in lift and shift manner and is self-centering.



**SIZE W x L x H in inches (mm)**

-7.75W x 48.0L x 4.5"H

-7.75W x 96.0L x 4.5"H

**MOUNTING**


Surface or Suspended



**ORDERING INFORMATION**


Example: 202A48LS32W3450LDMV35K

**STANDARD**

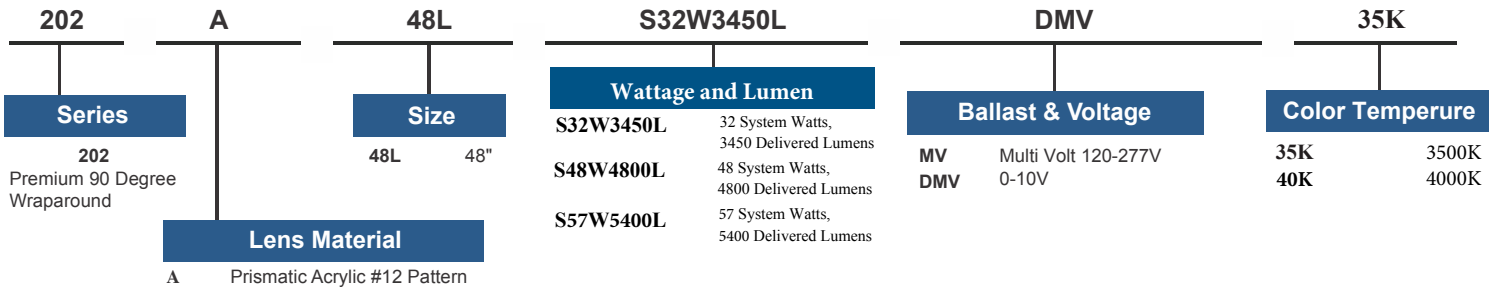

**HIGH OUTPUT**

Example: 202A48LH72W7000LMV35K

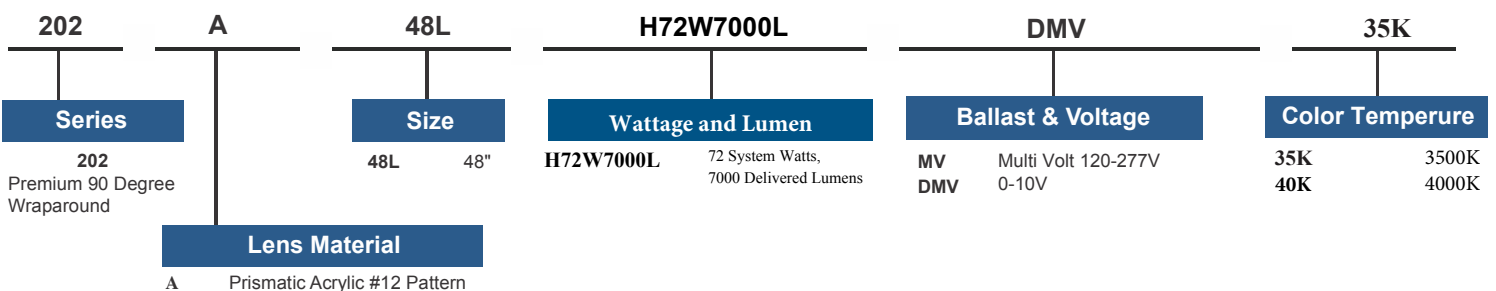


\* Consult for more options

|                 |
|-----------------|
| Catalog Number: |
| Notes:          |

# 202 Series 8ft

Premium 90 Degree Wraparound



Example: 202A96LS65W7000LDMV35K

## ORDERING INFORMATION

### STANDARD

|  |                                 |             |  |   |                                      |
|--|---------------------------------|-------------|--|---|--------------------------------------|
| <b>202</b>                             | <b>A</b>                        | <b>96L</b>  | <b>S65W7000L</b>   | <b>DMV</b>  | <b>35K</b>                           |
| <b>Series</b>                          |                                 | <b>Size</b> | <b>Wattage and Lumen</b>   | <b>Ballast &amp; Voltage</b>                      | <b>Color Temperature</b>             |
| 202<br>Premium 90 Degree<br>Wraparound |                                 | 96L 96"     | <b>S65W7000L</b> 65 System Watts,<br>7000 Delivered Lumens<br><b>S97W9600L</b> 97 System Watts,<br>9600 Delivered Lumens | <b>MV</b> Multi Volt 120-277V<br><b>DMV</b> 0-10V | <b>35K</b> 3500K<br><b>40K</b> 4000K |
|  | <b>Lens Material</b>            |             |  |   |                                      |
|  | A Prismatic Acrylic #12 Pattern |             |  |   |                                      |

### HIGH OUTPUT

Example: 202A96LH110W11200LMV35K


|  |                                 |             |  |   |                                      |
|--|---------------------------------|-------------|--|---|--------------------------------------|
| <b>202</b>                             | <b>A</b>                        | <b>96L</b>  | <b>H110W11200L</b>   | <b>DMV</b>  | <b>35K</b>                           |
| <b>Series</b>                          |                                 | <b>Size</b> | <b>Wattage and Lumen</b>   | <b>Ballast &amp; Voltage</b>                      | <b>Color Temperature</b>             |
| 202<br>Premium 90 Degree<br>Wraparound |                                 | 96L 96"     | <b>H110W11200L</b> 110 System Watts,<br>11200 Delivered Lumens<br><b>H144W14000L</b> 144 System Watts,<br>14000 Delivered Lumens | <b>MV</b> Multi Volt 120-277V<br><b>DMV</b> 0-10V | <b>35K</b> 3500K<br><b>40K</b> 4000K |
|  | <b>Lens Material</b>            |             |  |   |                                      |
|  | A Prismatic Acrylic #12 Pattern |             |  |   |                                      |

\* Consult for more options

## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

### FIXTURE CROSS SECTION VIEW



### FIXTURE BACK PLAN VIEW

