

44 Series Square

Architectural Square Linear Fixture

FEATURES & SPECIFICATIONS

INTENDED USE

Make a bold statement in your space with this dramatic geometric shaped linear line of light. Choose from two sizes of squares, 4 and 8 foot sides, in a 4 inch linear profile. Lit corners, shadowless LED lighting and energy efficient performance provides excellent general lighting. This distinctive architectural preconfigured fixture is ideal for circulation spaces, lobbies, retail and conference rooms. Available in two lumen packages and in a variety of finishes. Standard lens is a snap in frosted lens especially made for LED. Other lens options including a bladed louver are available. Fixture assembles and installs easily and quickly and mounts easily with 4 cable kits that connect at each corner.

SIZE W x L x H in inches

4x4 - 48"W x 48"L x 4"H

8x8 - 96"W x 96"L x 4"H

HOUSING

Die-formed and welded 22-gauge cold rolled steel Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Uplight fixtures have 1/2" x 4" apertures along the top of the housing to provide approximately uniform ambient uplight for ceiling illumination.

MOUNTING

Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.



Features

- Lamp life rated at 50,000 hours
- 6 or 8 watts per foot
- 100 lumens per Watt
- 5 years warranty
- >80 CRI

ORDERING INFORMATION

Example: 44SMW48LUR24W2400LDMV40KWH

44P	SF	4X4		R96W		DMV		40K		WH
Series			Direct/Indirect			Driver		Color Temperature		Finish
44P Pendant Mount Direct Only			U Up Light Only Blank Down Light Only			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire		30K 3000K 35K 3500K 40K 4000K 50K 5000K		WH White BK Black SI Silver
		Length		Wattage & Lumen						
		4X4 - 48"W x 48"L x 4"H		R96W 96 System Watts, 9600 Delivered Lumens						
		8X8 - 96"W x 96"L x 4"H		R128W 128 System Watts, 12800 Delivered Lumens						
				R192W 192 System Watts, 19200 Delivered Lumens						
				R256W 256 System Watts, 25600 Delivered Lumens						
		Lens Material								Cable
		SP1 Specular Parabolic Louver PLA White Cubed Acrylic Louver BL Bladed Louver Semi Specular A Prismatic Acrylic #12 pattern MW Matte White Lens SF Snap In Frosted Acrylic Lens (85% transmission) *Special for LEDs								SQHC401WH 4 ft. cable kit with 3 wires Power Feed SQHC402WH 8 ft. cable kit with 3 wires Power Feed SQHC4015WWH 4 ft. cable kit with 5 wires Power Feed SQHC4025WWH 8 ft. cable kit with 5 wires Power Feed

Notes *Custom length available. Consult factory for additional information.

Texas Fluorescents
2055 Luna Rd. Suite 142 Carrollton, TX 75006


Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:


44 Series Square

Architectural Square Linear Fixture

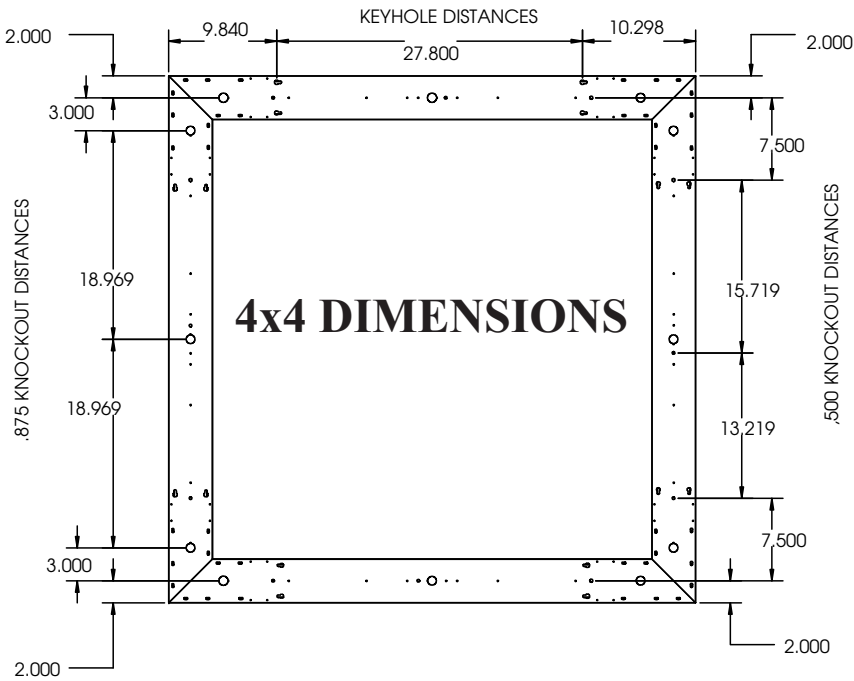

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

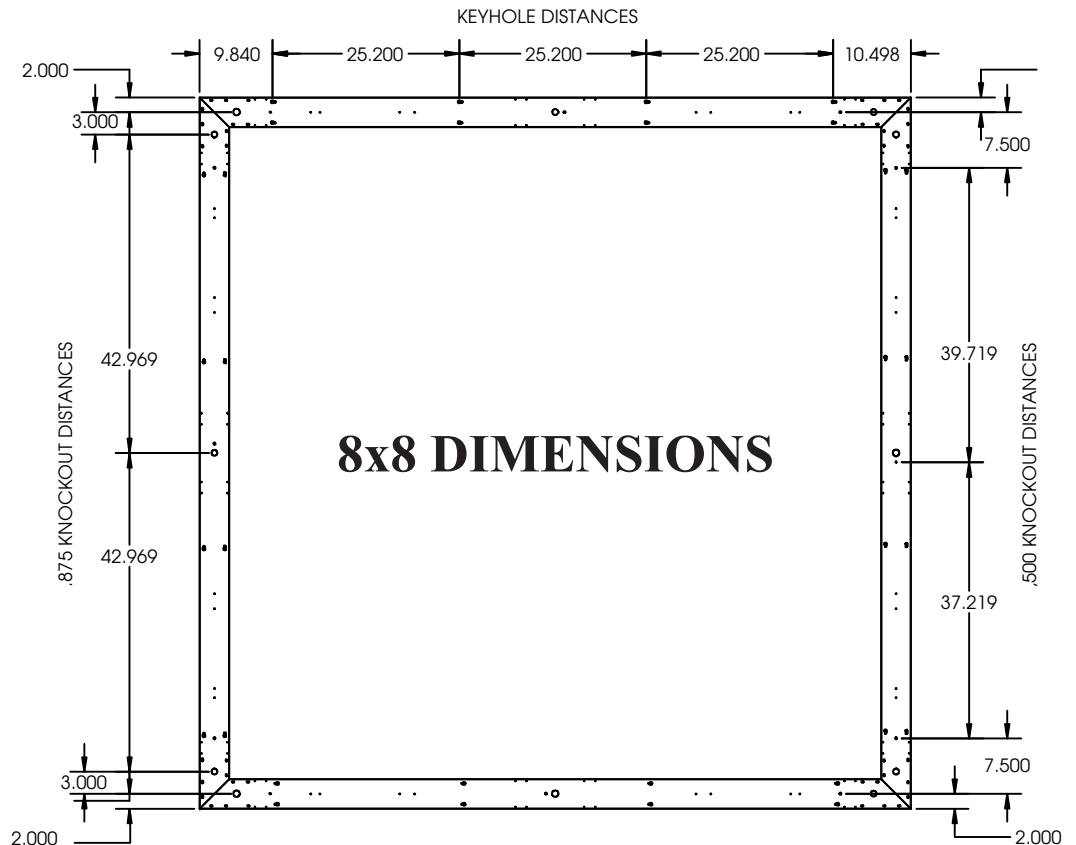

Catalog Number:
Notes: