



T E X A S

F L U O R E S C E N T S

# CBF 1x4

LED Volumetric Recessed Luminaire

## FEATURES & SPECIFICATIONS

### INTENDED USE


The CBF LED is a specification grade, Volumetric Recessed LED Luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened appearance to the modern office environment.

### SPECIFICATIONS

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal.

### FEATURES

- Volumetric recessed luminaire provides a low glare light source
- Matte white reflective surface for soft, uniform light distribution
- 0-10V dimming driver standard
- Easy access plate for quick wiring
- ETL Listed for damp locations

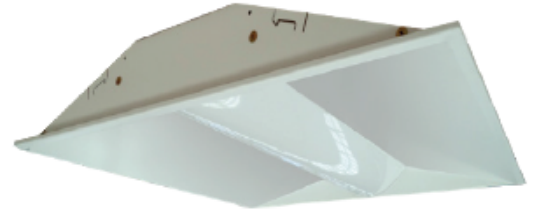

### SIZE W x L x H in inches

- 1x4** 12.00"W x 48.00"L x 3.26"D
- 2x2** 24.00"W x 24.00"L x 3.26"D
- 2x4** 24.00"W x 48.00"L x 3.26"D

## ORDERING INFORMATION

Example: UCLL14LF35W4600LDMV40K

CBF	14L	F35W4600L	DMV	40K
Series	Size	Wattage / Lumen	Driver	Color Temperature
CBF Center Basket Grid Mount	14L	<b>F22Y 3100N</b> 22 System Watts, 3100 Delivered Lumens <b>F30Y 4000N</b> 30 System Watts, 4000 Delivered Lumens <b>F35Y 4600N</b> 35 System Watts, 4600 Delivered Lumens <b>F40Y 5100N</b> 40 System Watts, 5100 Delivered Lumens <b>F48Y 6000N</b> 48 System Watts, 6000 Delivered Lumens <b>F57Y 7000N</b> 57 System Watts, 7000 Delivered Lumens  <b>Value Line</b> <b>V46Y 5700N</b> 46 System Watts, 5700 Delivered Lumens	DMV 0-10V Dimming	<b>52M'</b> 3000K <b>57M'</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K

\* Consult FACTORY for more options

Catalog Number:
Notes:




T E X A S

F L U O R E S C E N T S

# CBF 2x2

LED Volumetric Recessed Luminaire

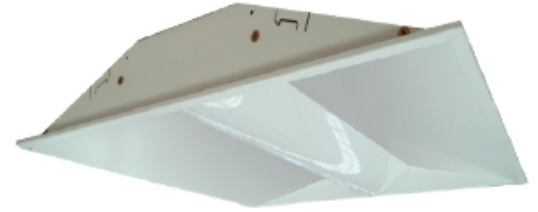

**CBF**

**Series**

CBF  
Center Basket  
Grid Mount

**22L**

**Size**

22L

**F18W2100L**

**Wattage / Lumen**

<b>F15Y 1900N</b>	15 System Watts, 1900 Delivered Lumens
<b>F18Y 2100N</b>	18 System Watts, 2100 Delivered Lumens
<b>F20Y 2500N</b>	20 System Watts, 2500 Delivered Lumens
<b>F24Y 3000N</b>	24 System Watts, 3000 Delivered Lumens
<b>F28Y 3200N</b>	28 System Watts, 3200 Delivered Lumens
<b>F30Y 3600N</b>	30 System Watts, 3600 Delivered Lumens
<b>F35Y 4200N</b>	35 System Watts, 4200 Delivered Lumens
<b>F40Y 4700N</b>	40 System Watts, 4700 Delivered Lumens
<b>F45Y 5100N</b>	45 System Watts, 5100 Delivered Lumens

**DMV**

**Driver**

DMV 0-10V Dimming

**40K**

**Color Temperature**

<b>52M'</b>	3000K
<b>57M'</b>	3500K
<b>40K</b>	4000K
<b>50K</b>	5000K

\* Consult FACTORY for more options

Texas Fluorescents

2055 Luna Rd. Suite 142 Carrollton, TX 75006

Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:

Notes:



T E X A S

F L U O R E S C E N T S

# CBF 2x4

LED Volumetric Recessed Luminaire



**CBF**

---

**Series**

CBF  
Center Basket  
Grid Mount

**24L**

---

**Size**

24L

**F35W4500L**

---

**Wattage / Lumen**

<b>F22Y 3100N</b>	22 System Watts, 3100 Delivered Lumens
<b>F28Y 3800N</b>	28 System Watts, 3800 Delivered Lumens
<b>F30Y 4100N</b>	30 System Watts, 4100 Delivered Lumens
<b>F32Y 4300N</b>	32 System Watts, 4300 Delivered Lumens
<b>F35Y 4500N</b>	35 System Watts, 4500 Delivered Lumens
<b>F40Y 5200N</b>	40 System Watts, 5200 Delivered Lumens
<b>F48Y 6200N</b>	48 System Watts, 6200 Delivered Lumens
<b>F57Y 7200N</b>	57 System Watts, 7200 Delivered Lumens
<b>F62Y 7900N</b>	62 System Watts, 7900 Delivered Lumens

**DMV**

---

**Driver**

DMV 0-10V Dimming

**40K**

---

**Color Temperature**

<b>52M'</b>	3000K
<b>57M'</b>	3500K
<b>40K</b>	4000K
<b>50K</b>	5000K

**Value Line**

<b>V46Y 5700N</b>	46 System Watts, 5700 Delivered Lumens
-------------------	---

\*Consult FACTORY for more options

Catalog Number:
Notes: