



**FEATURES & SPECIFICATIONS**

- Compact, low-profile design.
- Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup units.
- Emergency battery backup model (EM) is completely self-contained.
- Infield installable directional indicators.
- Standard AC and emergency units available.
- AC on indicator light and test switch (EM units only)
- Sealed lead battery on emergency (EM) units.
- 120/277 Volt Operation.



Offering Precise Engineering For Architectural Excellence To Truly Enhance Interior Spaces. Tri-mount canopy provides top, end, or back mount convenience.

**DIMENSIONS**

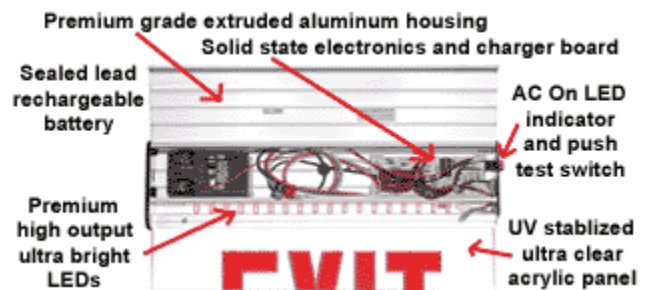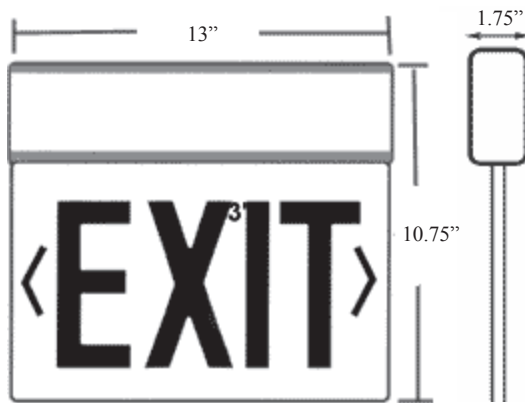

**ORDERING INFORMATION**

Series	Canopy	Number of Faces	Panel Color Letters/Background	Housing Finish	Operation
KWTE	U - Universal mounting canopy included	1 - Single Face 2 - Double Face	RC - Red on Clear GC - Green on Clear	W - White B - Black A - Brushed Aluminum	EM - Battery Backup Blank - AC Only

Catalog Number:
Notes: