

KXTEU

Die-Cast Aluminum LED Exit Sign



STANDARD



OPTIONAL



ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


OPTIONS

- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

DIMENSIONS

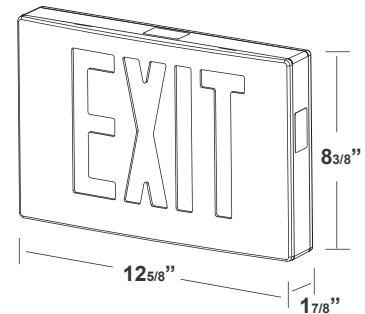

ORDERING INFORMATION

Sample Part Number: **KXTEU-1-R-B-A-EM**

Special voltage options available. Check with your Best Lighting Representative.

| Model | No. of faces | Letters | Housing | Face | Battery | Options |
|-------|---------------------------------|---------|------------|------------|--------------------|---|
| KXTEU | 1 Single Face | R Red | W White | W White | Blank AC Only | SDT Self-diagnostics |
| | 2 Double Face | G Green | B Black | B Black | EM Battery Back-up | 2C Dual-Circuit |
| | 3 Universal Single /Double Face | | A Aluminum | A Aluminum | | TP Tamper-Proof USA Assembled in the USA |

| |
|-----------------|
| Catalog Number: |
| Notes: |

KXTEU

Die-Cast Aluminum LED Exit Sign



ELECTRICAL INFORMATION

| Catalog Number | Input Watts (W) | | Input Amps (A) | |
|-----------------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| KXTEU-RED/EM/2C/SDT | 3.2 | 3.6 | 0.031 | 0.019 |
| KXTEU-GREEN/EM/2C/SDT | 3.8 | 4.4 | 0.033 | 0.017 |

| |
|-----------------|
| Catalog Number: |
| Notes: |