



T E X A S

F L U O R E S C E N T S

PUFF Series

PUFF 1X4 Cloud Fixture



DIFFUSER

One piece .170 smooth opal 100% acrylic for a fully luminous light source. Special concealed hinges allow lens to swing down from either side to facilitate relamping.

TYPICAL OPTIONS AND ACCESSORIES

Whips, and lenses. See options page at the end of the T02SURF section, or contact factory for more details.

FEATURES & SPECIFICATIONS

INTENDED USE

A puff of light to illuminate the most discriminating office or home. A shallow contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels.

SIZE W x L x H in inches (mm)

- 1x4: 11.75W x 50.5L x 6.0Dp
- 2x2: 26.5W x 26.5L x 6.0Dp
- 2x4: 26.5W x 50.5L x 6.0Dp
- 248L: 11.0W x 50.5L x 6.0Dp
- 424L: 17.0W x 26.5L x 6.0Dp
- 448L: 17.0W x 50.5L x 6.0Dp

CONSTRUCTION

All metal parts die formed from heavy gauge cold roll steel housing spot welded to insure uniformity and dimensional stability.

ORDERING INFORMATION

Example: PUF14LF32W3200LDMV40K

PUFF 1X4

STANDARD

PUF	14L	F32W3200L	DMV	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	14L 1 x 4	F32W3200L 32 System Watts, 3200 Delivered Lumens F48W4500L 48 System Watts, 4500 Delivered Lumens F57W5100L 57 System Watts, 5100 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

PUF	14L	H72W6500L	DMV	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	14L 1 x 4	H72W6500L 72 System Watts, 6500 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

*Consult for more options



Texas Fluorescents
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 Fax: 972-247-0200
 www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:



T E X A S

F L U O R E S C E N T S

PUFF Series

PUFF 2X2 Cloud Fixture



ORDERING INFORMATION

Example: PUF22LF28W2550LDMV40K

PUFF 2X2

STANDARD

PUF	22L	F28W2550L	DMV	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	22L 2 x 2	F24W2250L 24 System Watts, 2250 Delivered Lumens F28W2550L 28 System Watts, 2550 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

PUF	22L	H36W3250L	DMV	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	22L 2 x 2	H36W3250L 36 System Watts, 3250 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

*Consult for more options



Catalog Number:
Notes:

PUFF Series

PUFF 2X4 Cloud Fixture



ORDERING INFORMATION

Example: PUF24LF32W3200LDMV40K

PUFF 2X4

STANDARD

PUF	24L	F32W3200L	DMV	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	24L 2 x 4	F32W3200L 32 System Watts, 3200 Delivered Lumens F48W4500L 48 System Watts, 4500 Delivered Lumens F57W5100L 57 System Watts, 5100 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

PUF	24L	H72W6500L	DMV	40K
Series	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	24L 2 x 4	H72W6500L 72 System Watts, 6500 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

*Consult for more options



Catalog Number:
Notes:


PUFF Series

Cloud Fixture



T E X A S

F L U O R E S C E N T S

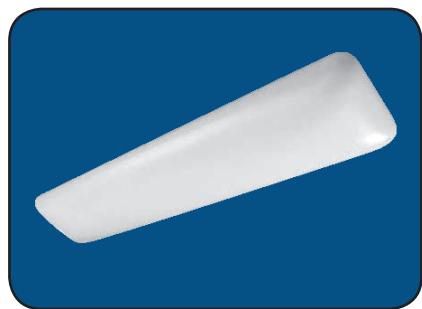

ORDERING INFORMATION

Example: PUF448LF32W3200LDMV40K

STANDARD

PUF	4	48L	F32W3200L	DMV	40K
Series	Width	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	4 17.0	24L 26.5" 48L 50.5"	F32W3200L 32 System Watts, 3200 Delivered Lumens F48W4500L 48 System Watts, 4500 Delivered Lumens F57W5100L 57 System Watts, 5100 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

PUF	4	48L	H72W6500L	DMV	40K
Series	Width	Size	Wattage and Lumen	Driver	Color Temperature
PUF LED Cloud Fixture	2 11.0 4 17.0	48L 50.5"	H72W6500L* 72 System Watts, 6500 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K

*Consult for more options



Catalog Number:
Notes:

Texas Fluorescents
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 Fax: 972-247-0200
www.texasfluorescents.com email: sales@texasfluorescents.com


PUFF Series

Cloud Fixture







T E X A S

F L U O R E S C E N T S

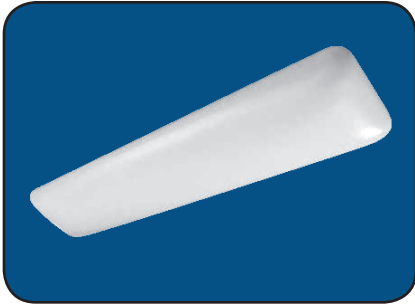

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

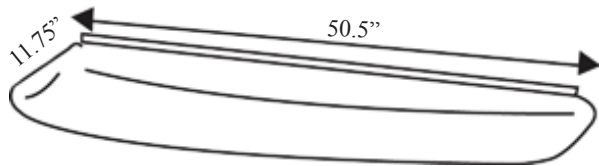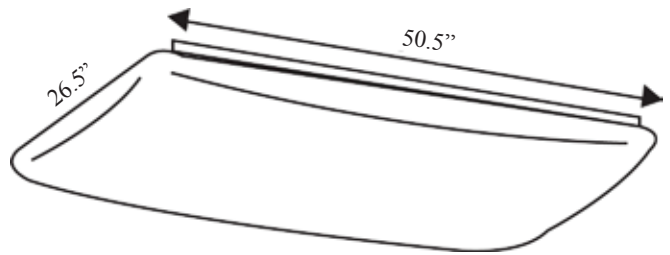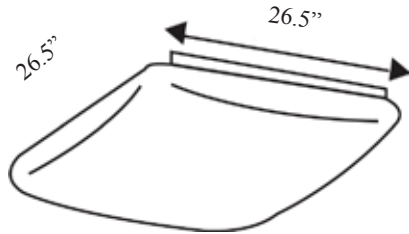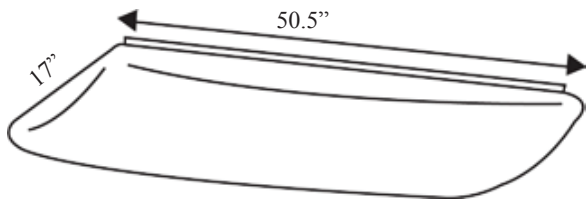

*Consult for more options



Catalog Number:
Notes: