

## FEATURES & SPECIFICATIONS

### INTENDED USE

Narrow body one lamp strip for interior warehouse, retail, and utility areas requiring general illumination in a commercial quality narrow strip configuration.


SIZE W x L x H in inches (mm)

2.75W x 1.80H (70 x 45)

### MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back, side, and end of housing. Ballast covers or reflectors attach without tools to simplify ballast access.

- W3x, economical white steel reflectors, for abusive locations  
Two styles: symmetric and asymmetric
- M2, premium full specular (mirrored) reflectors, for maximum efficiency
- W1x, high reflectance white aluminum reflectors, combine economy and efficiency

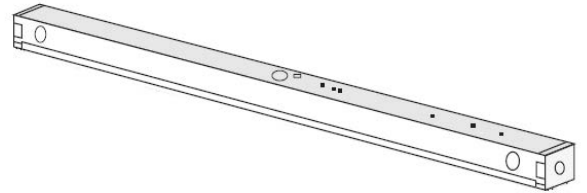

### MOUNTING

Surface mount, chain hung, double stem. See end of chapter T02Strip for accessory mount kits.

### TYPICAL OPTIONS AND ACCESSORIES

Whips and wire guards. See options page at the end of the T02Strip section, or contact factory for more details.

## ORDERING INFORMATION

### STANDARD

S	48L	S20W2076L	DMV	40K	Options
Series	Width	Wattage and Lumen	Driver	Kelvin Temperature	
S	48L 48" 96L 96"	<b>S20W2076L*</b> 20 System Watts, 2076 Delivered Lumens <b>S44W4486L**</b> 44 System Watts, 4486 Delivered Lumens	<b>DMV</b> 0-10V <b>MV</b> Multi - Volt 120V-277V	<b>35K</b> 3500K <b>40K</b> 4000K	<b>WP</b> 6 ft. 3 wire 18 gauge whip <b>WP10</b> 6 ft. 4 wire 18 gauge whip
Narrow Body Strip, with or without Reflectors		*20W is not available in 96" length **44W is not available in 48" length	<b>Reflectors</b>		
			<b>Blank</b> No Reflector <b>W3 0</b> White Steel reflector Standard Mount <b>W3 5</b> White Steel reflector Asymmetric <b>M2 0</b> Mirrored reflector Standard Mount <b>W1 0</b> White Aluminum reflector Standard Mount		

Example: S48LS20W2076LDMV40K

### HIGH OUTPUT

S	48L	H40W3798L	DMV	40K	Options
Series	Width	Wattage and Lumen	Driver	Kelvin Temperature	
S	48L 48" 96L 96"	<b>H40W3798L*</b> 40 System Watts, 3798 Delivered Lumens <b>H57W5793L**</b> 57 System Watts, 5793 Delivered Lumens	<b>DMV</b> 0-10V <b>MV</b> Multi - Volt 120V-277V	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K	<b>WP</b> 6 ft. 3 wire 18 gauge whip <b>WP10</b> 6 ft. 4 wire 18 gauge whip
Narrow Body Strip, with or without Reflectors		*40W is not available in 96" length **57W is not available in 48" length	<b>Reflectors</b>		
			<b>Blank</b> No Reflector <b>W3 0</b> White Steel reflector Standard Mount <b>W3 5</b> White Steel reflector Asymmetric <b>M2 0</b> Mirrored reflector Standard Mount <b>W1 0</b> White Aluminum reflector Standard Mount		

Example: S48LH40W3798LDMV40K

\* Consult for more options

## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

