

# W4A Series

## Linear Wall Washer Fixture



### FEATURES & SPECIFICATIONS

#### INTENDED USE

A linear Wall Washer fixture for distinctive architectural lighting plans. Ideal for lobbies, bathroom and office areas. W4A Series fixtures can be installed individually or in group patterns.

#### SIZE W x L x H in inches

2ft. - 4" x 24" x 4"

4ft. - 4" x 48" x 4"

8ft. - 4" x 96" x 4"

#### HOUSING

Die-formed and welded 22-gauge cold rolled steel Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. The housing to provide approximately uniform ambient uplight for ceiling illumination.

#### DIFFUSERS (not included)

Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers.

#### MOUNTING

Fixtures can be Semi-Recessed, Surface Mounted to the ceiling or pendant hung by stem or cable.

#### TYPICAL OPTIONS AND ACCESSORIES


Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.



### ORDERING INFORMATION

#### 2FT

Example: W4ASSF24LR12W1200LDMV40KWH

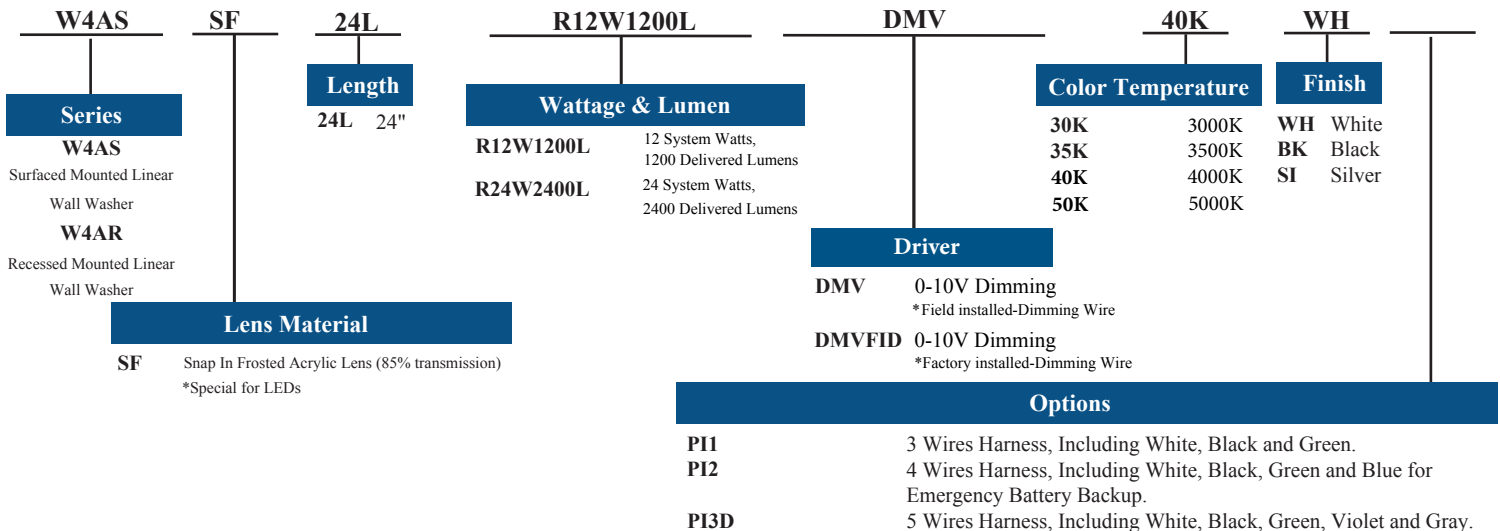

#### Notes

\*Custom louvers available in any cell configuration. Consult factory for additional information.

Texas Fluorescents

2055 Luna Rd. Suite 142 Carrollton, TX 75006

Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com

Catalog Number:
Notes:

# W4A Series

## Linear Wall Washer Fixture



### FEATURES & SPECIFICATIONS

#### ORDERING INFORMATION

##### 4FT

Example: W4ASSF48LR24W2400LDMV40KWH

W4AS	SF	48L	R24W2400L	DMV	40K	WH	
<b>Series</b>		<b>Length</b>	<b>Wattage &amp; Lumen</b>		<b>Color Temperature</b>		<b>Finish</b>
<b>W4AS</b> Surfaced Mounted Linear Wall Washer <b>W4AR</b> Recessed Mounted Linear Wall Washer		48L 48"	<b>R24W2400L</b> 24 System Watts, 2400 Delivered Lumens <b>R48W4800L</b> 48 System Watts, 4800 Delivered Lumens		<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K		<b>WH</b> White <b>BK</b> Black <b>SI</b> Silver
<b>Lens Material</b>							<b>Driver</b>
<b>SF</b> Snap In Frosted Acrylic Lens (85% transmission) *Special for LEDs							<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire
<b>Options</b>							
<b>PI1</b> 3 Wires Harness, Including White, Black and Green. <b>PI2</b> 4 Wires Harness, Including White, Black, Green and Blue for Emergency Battery Backup. <b>PI3D</b> 5 Wires Harness, Including White, Black, Green, Violet and Gray.							

#### ORDERING INFORMATION

##### 8FT

Example: W4ASSF96LR48W4800LDMV40KWH

W4AS	SF	96L	R48W4800L	DMV	40K	WH	
<b>Series</b>		<b>Length</b>	<b>Wattage &amp; Lumen</b>		<b>Color Temperature</b>		<b>Finish</b>
<b>W4AS</b> Surfaced Mounted Linear Wall Washer <b>W4AR</b> Recessed Mounted Linear Wall Washer		96L 96"	<b>R48W4800L</b> 48 System Watts, 4800 Delivered Lumens <b>R96W9600L</b> 96 System Watts, 9600 Delivered Lumens		<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K		<b>WH</b> White <b>BK</b> Black <b>SI</b> Silver
<b>Lens Material</b>							<b>Driver</b>
<b>SF</b> Snap In Frosted Acrylic Lens (85% transmission) *Special for LEDs							<b>DMV</b> 0-10V Dimming *Field installed-Dimming Wire <b>DMVFID</b> 0-10V Dimming *Factory installed-Dimming Wire
<b>Options</b>							
<b>PI1</b> 3 Wires Harness, Including White, Black and Green. <b>PI2</b> 4 Wires Harness, Including White, Black, Green and Blue for Emergency Battery Backup. <b>PI3D</b> 5 Wires Harness, Including White, Black, Green, Violet and Gray.							

#### Notes

\*Custom louvers available in any cell configuration. Consult factory for additional information.

Catalog Number:
Notes:

# W4A Series


Linear Wall Washer Fixture




## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

### Recessed Mounted Drawing

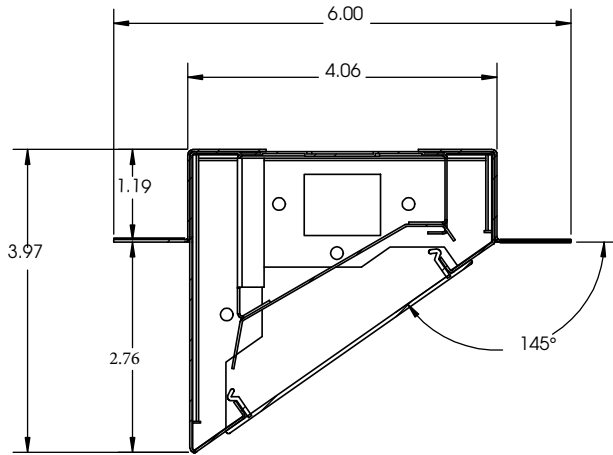


### Surfaced Mounted Drawing

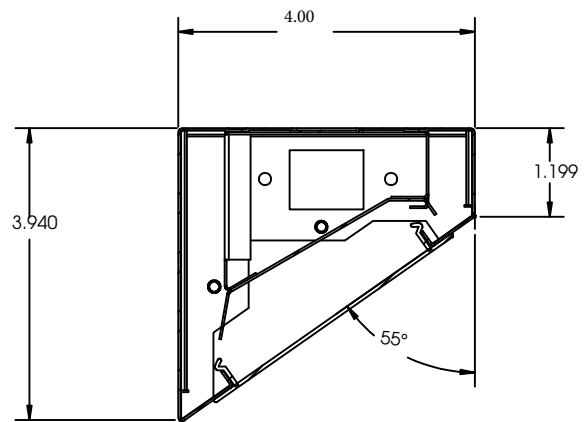


### 4FT Recessed Mounted Drawing

KNOCKOUT DISTANCES

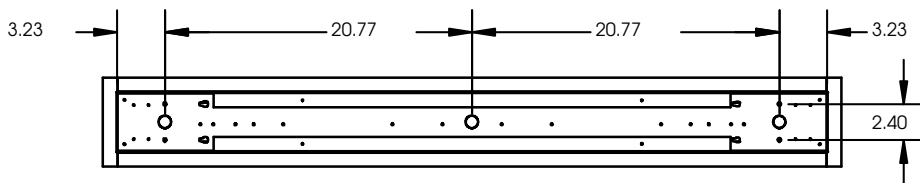

### 4FT Surfaced Mounted Drawing

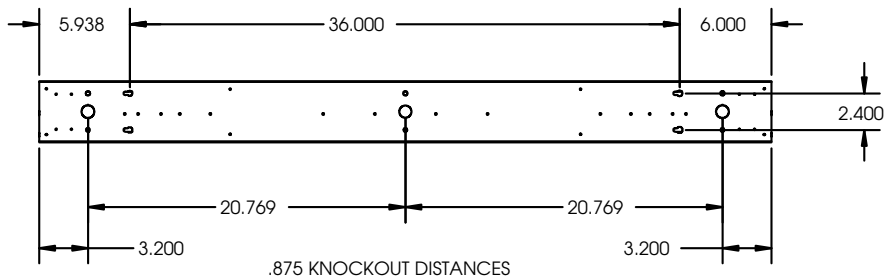

Catalog Number:
Notes:

Texas Fluorescents  
 2055 Luna Rd. Suite 142 Carrollton, TX 75006  
 Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.c