


## FEATURES & SPECIFICATIONS

- ABS, corrosion resistant UV Stabilized enclosure.
- AC only or self-powered models.
- Universal 120/277 VAC Operation.
- Removable Directional indicators.
- Extremely low operating costs.
- 80-Year light source life expectancy.
- Meets NFPA Life Safety 101, NEC, OSHA, NEC, Local and State Codes.



LED Series exit signs feature an enclosure resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water.

## DIMENSIONS

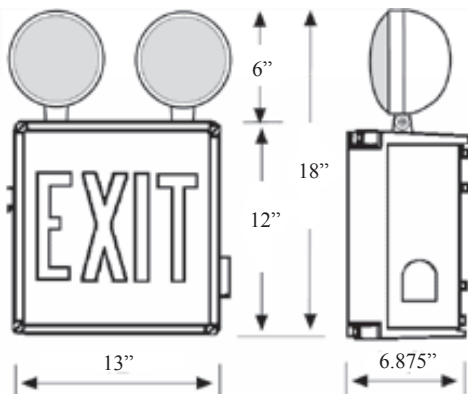

### AC Only Units

Catalog Model #	Letter Color	Voltage Input	Lamp Type	Warranty
WLXTER	Red	120/277	LED	Yes
WLXTEG	Green	120/277	LED	Yes

### Battery Backup Units

Catalog Model #	Letter Color	Voltage Input	Lamp Type	Emergency Operation	Warranty
WLXTEREM	Red	120/277	LED	90-Min	Yes
WLXTEGEM	Green	120/277	LED	90-Min	Yes

Catalog Number:
Notes: