

Project:	
Type:	
Catalog #:	



STANDARD



ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


OPTIONS

- SPV: UL Listed for special voltage option.

WARRANTY / LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C – 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

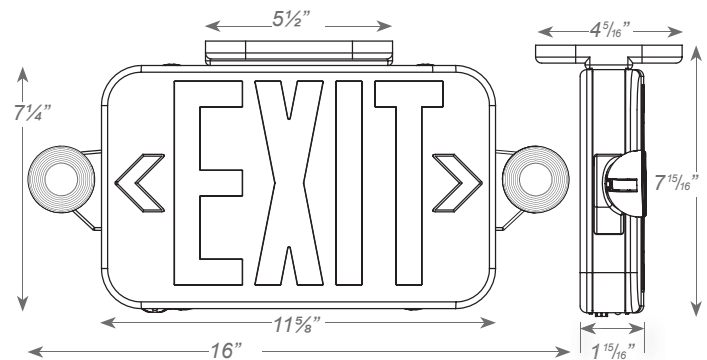

ORDERING INFORMATION

Sample Part Number: **CEU-3-R-W**

MODEL	FACE	LETTER COLOR	HOUSING COLOR	OPTIONS
CEU	3 Universal Single/Double	R Red G Green	W White B Black	RC Remote Capacity SPV 120/230 Volt 50/60Hz

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
CEU RED	1.1	1.2	1.3	0.08	0.09	0.09
CEU RED RC	1.6	1.6	1.6	0.12	0.11	0.11
CEU GREEN	1.1	1.2	1.3	0.08	0.09	0.09
CEU GREEN RC	1.6	1.6	1.6	0.12	0.11	0.11

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY													
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED	
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V		
CEU-RC	3.6V	2W	X		X											