

FEATURES & SPECIFICATIONS

INTENDED USE

Narrow body one lamp strip for interior warehouse, retail, and utility areas requiring general illumination in a commercial quality narrow strip configuration.


SIZE W x L x H in inches (mm)

2.75W x 1.80H (70 x 45)

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back, side, and end of housing. Ballast covers or reflectors attach without tools to simplify ballast access.

- W3x, economical white steel reflectors, for abusive locations
Two styles: symmetric and asymmetric
- M2, premium full specular (mirrored) reflectors, for maximum efficiency
- W1x, high reflectance white aluminum reflectors, combine economy and efficiency

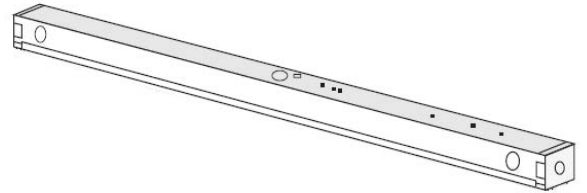

MOUNTING

Surface mount, chain hung, double stem. See end of chapter T02Strip for accessory mount kits.

TYPICAL OPTIONS AND ACCESSORIES

Whips and wire guards. See options page at the end of the T02Strip section, or contact factory for more details.

ORDERING INFORMATION

STANDARD

Example: S48LS20W2076LDMV40K

S	48L	S20W2076L		DMV	40K	
Series	Width	Wattage and Lumen	Reflectors	Driver	Kelvin Temperature	Options
S	48L 48" 96L 96"	S20W2076L* 20 System Watts, 2076 Delivered Lumens S44W4486L** 44 System Watts, 4486 Delivered Lumens	Blank No Reflector W3 0 White Steel reflector Standard Mount W3 5 White Steel reflector Asymmetric M2 0 Mirrored reflector Standard Mount W1 0 White Aluminum reflector Standard Mount	DMV 0-10V MV Multi - Volt 120V-277V	35K 3500K 40K 4000K	WP 6 ft. 3 wire 18 gauge whip WP10 6 ft. 4 wire 18 gauge whip
Narrow Body Strip, with or without Reflectors		*20W is not available in 96" length **44W is not available in 48" length				

HIGH OUTPUT

Example: S48LH40W3798LDMV40K

S	48L	H40W3798L		DMV	40K	
Series	Width	Wattage and Lumen	Reflectors	Driver	Kelvin Temperature	Options
S	48L 48" 96L 96"	H40W3798L* 40 System Watts, 3798 Delivered Lumens H57W5793L** 57 System Watts, 5793 Delivered Lumens	Blank No Reflector W3 0 White Steel reflector Standard Mount W3 5 White Steel reflector Asymmetric M2 0 Mirrored reflector Standard Mount W1 0 White Aluminum reflector Standard Mount	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WP 6 ft. 3 wire 18 gauge whip WP10 6 ft. 4 wire 18 gauge whip
Narrow Body Strip, with or without Reflectors		*40W is not available in 96" length **57W is not available in 48" length				

* Consult for more options

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

